

Via Circonvallazione, 10 13018 Valduggia (VC), Italy Tel: +39 0163 47891 Fax: +39 0163 47895 www.vironline.com



Polypropylene copolymer ball bib cock
Threaded M (ISO 228/1) with hose union
Ice-damaging resistant one piece body
Brass internal parts and hose union

(quick release plastic hose union available as option up to DN≤20) Blow-out proof brass stem, with handle or butterfly

TR CU 010 compliant

### PN16

Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

## Working conditions

• Suitable for: water, -20°C to +75°C

• Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)

# (A)(68/UE)

alt.

8

# **PARTLIST**

Part	Material	Norm			
Hose union	Nickel pl. Brass <sup>1</sup>	EN12165 CW617N			
Ring nut	Nickel pl. Brass <sup>1</sup>	EN12165 CW617N			
Threaded end	Brass	EN12165 CW617N			
Body	Polyprop. copolymer	-			
Ball	Chromium pl. brass	EN12164 CW617N			
Stem	Brass	EN12164 CW617N			
O-ring	NBR	-			
Ring	Brass	EN12165 CW617N			
Seat	PTFE	-			
Screw	Dacromet steel	EN10025 Fe42			
Handle	PA6 Polyamide <sup>2</sup>	-			
Butterfly	PA6 Polyamide <sup>3</sup>	-			
	Hose union Ring nut Threaded end Body Ball Stem O-ring Ring Seat Screw Handle	Hose union Ring nut Nickel pl. Brass Nickel pl. Brass Nickel pl. Brass  Body Polyprop. copolymer Ball Chromium pl. brass Stem Brass O-ring NBR Ring Brass Seat PTFE Screw Dacromet steel Handle PA6 Polyamide <sup>2</sup>			


<sup>1</sup>With NBR gasket and polypropylene aerator for brass version; in one piece with NBR gasket and EPDM external O-ring for version with (polyamide) plastic hose union

# **DIMENSIONS**

DN	G E	<b>=</b> 1	AA	AB	D	Р	HA	НВ	L	HF	F	Weight
		-	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
015	1/2"	1/2"	105 / 108 <sup>2</sup>	56	11,8	10	55 / 56 <sup>2</sup>	47	85	41	61	140 / 126 <sup>2</sup>
020	3/4"	3/4"	132 / 133 <sup>2</sup>	75	13,0	15	$77 / 74^2$	55	102	50	65	233 / 207 <sup>2</sup>
025	1"	1"	158	86	16,0	20	80	59	102	54	65	358

Only for version with brass hose union

<sup>&</sup>lt;sup>2</sup>Version with brass hose union / versione with plastic hose union

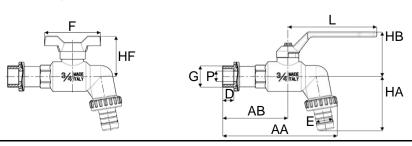

<sup>&</sup>lt;sup>2</sup>50% glass fiber reinforced

<sup>330%</sup> glass fiber reinforced