

EEM 20 - EEM electric pumps



The best solution for the suction and transfer of liquids, thanks to the strong self-priming capacity, the ability to run even with discontinuous presence of the liquid in suction and the reversibility of the flow. The EEM series is made of CB754S brass and, even if cheapness is its strength, it is equipped with a high quality two-phase electric motor equipped with a practical tilting inverter. They are really multifunctional pumps, capable of solving multiple pumping problems. For each application, it is necessary to check the suitability and choose appropriate gaskets.

The product are particularly suitable for use:

- domestic environment (water, diesel, water systems, irrigation)

Hydraulic specifications

- Maximum capacity : 28 lt/min
- Maximum head : 22 m
- Gasket on the shaft: Seal
- Maximum priming height : 6 m
- Threaded ports: 3/4"
- Maximum liquid density 1.1g/cm³ free of hard particles in suspension
- Maximum temperature 90°C
- Not suitable for aggressive liquids towards pump construction materials and gaskets (see technical specifications)
- Not appropriate for the transfer of petrol, solvents and, in general, in environments with risk of explosion and fire
- Possibility of reversing the pumping flow
- Coupling with impeller free
- Complete with a pair of brass hose fittings for pipes 20 (one straight and one curved)
- Possibility of working for short periods with closed pipes
- During installation, the pump must be filled with liquid, subsequently this operation is no longer necessary

Technical specifications

Material

- Pump Parts: Brass
- Counterflange: AISI 304
- Shaft : AISI 316
- Impeller : Brass
- Gaskets: NBR

MOTOR

- Powered with a Single-phase asynchronous 230V 50Hz
- Equipped with MEC 63 motor (2800 rpm 0.5HP / 0,4 KW)
- Service S1
- Ip protection degree 44
- Insulation class F
- Power connection via cable end Cable with Schuko plug 1m
- Switching on and reversing of the pumping flow through inverter switch

TELLARINI POMPE di G. Tellarini & C.

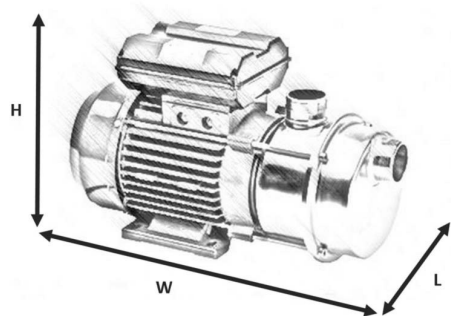
Via E. Maiorana, 4 - 48022 Lugo (Ravenna) Italy - Tel. +39 0545 22508 - Fax +39 0545 32362
https://www.tellarini.com - Email: tellarini@tellarini.com - sales@tellarini.com

Pump features

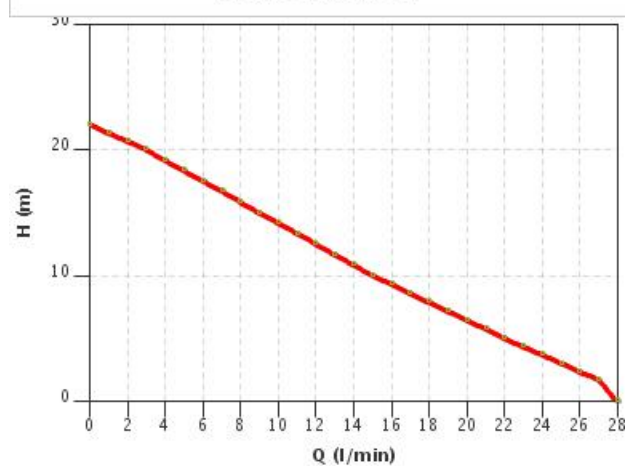
Ports	Hose fitting	Priming ability	Qmax	Hmax
3/4"	20 mm	6 m	28 lt/min	22 m

Overall dimensions

W	L	H	Weight	Leq A*
250 mm	120 mm	195 mm	5.8 kg	77 dB

**Capacity (l/min)**

1m	5m	10m	20m
28 lt/min	22 lt/min	15 lt/min	3 lt/min

Performance

Characteristics referring to operation with water at 20 °

* Leq A detected 1 meter from the pump surface

We reserve the right to make changes without prior notice.

TELLARINI POMPE di G. Tellarini & C.

Via E. Maiorana, 4 - 48022 Lugo (Ravenna) Italy - Tel. +39 0545 22508 - Fax +39 0545 32362
<https://www.tellarini.com> - Email: tellarini@tellarini.com - sales@tellarini.com