## **Delta™ Drip**


# Adjustable Drip Emitter (Registered Design)

### **FEATURES and BENEFITS**


- Rotation of the key in the body adjusts the flow rate from 0 to 6 l/h at 100 kPa. Flow rate may be increased or decreased until final shut off.
- Turbulent flow path.
- Two key types available:
  - 1. End-Line Adjustable 0-6 I/h key. (Black)
  - 2. In-Line Adjustable 0-6 I/h key. (Brown)
- Two body types to choose from depending on application:
  - 1. Standard body with 4 .5 mm inlet barb.
  - 2. Spike with 4.5 mm inlet barb.
- May be turned "OFF" when not in use.

#### **APPLICATIONS**

• May be used for vegetable patches, home gardens, nurseries, pots and shrubs.





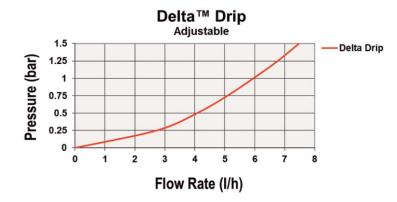



Barb End-Line





Delta™ Drip 4.5 mm Barb In-Line

#### FILTRATION REQUIREMENTS

• Drip Emitters: 100 microns (150 mesh)

| Delta™ Drip Emitters         |        |                 |                |              |               |
|------------------------------|--------|-----------------|----------------|--------------|---------------|
| PACKAGING                    |        |                 |                |              |               |
|                              |        | BARB End-Line   | SPIKE End-Line | BARB In-Line | SPIKE In-Line |
| Order<br>Codes               | Packs  | 200916          | 200904         | 203936       | 203944        |
|                              | Bulk   | 020091          | 020090         | 020393       | 020394        |
| Quantity<br>per<br>Bag       | Packs  | 100             | 25             | 100          | 25            |
|                              | Bulk   | 1000            | 1500           | 1000         | 1250          |
| Bags per<br>Carton           | Packs  | 70              | 50             | 70           | 50            |
|                              | Bulk   | 7               | 1              | 7            | 1             |
| Weight per<br>Carton<br>(kg) | Packs  | 13.4            | 7.0            | 13.4         | 7.0           |
|                              | Bulk   | 13.1            | 6.8            | 13.1         | 6.8           |
| Base Inlet Connection        |        | 4.5 mm Barb     | 4.5 mm Barb    | 4.5 mm Barb  | 4.5 mm Barb   |
| Dimensions Assembled         | Height | 17 mm           | 127 mm         | 17 mm        | 127 mm        |
|                              | Width  | 51 mm           | 51 mm          | 61 mm        | 61 mm         |
|                              | Depth  | 9 mm            | 10 mm          | 9 mm         | 10 mm         |
|                              | Weight | 1.72 g          | 4.63 g         | 1.8 g        | 4.7 g         |
| Material                     |        | U.V. Stabilized |                |              |               |

